

# SR 2-125 TWO-CHANNEL AMPLIFIER



## Product Overview

The SR 2-125 is a 125-watt stereo amplifier with DSP presets easily accessed through dials on the back of the amplifier. Whether the outdoor installation is hardscape or softscape, the amplifier presets optimize the best sound and performance of the SR1 system for any outdoor environment.

## Features and Benefits

- The SR 2-125 is pre loaded with 20 DSP presets expertly designed to bring the Sonarray SR1 landscape audio system to life.
- The SR 2-125 amplifier has analog, coax and toslink LINE INPUTS and LOOP OUTPUTS. The analog loop outputs are non buffered. The maximum number of amplifiers that can be looped together will depend on the output capability of your source component. The digital outputs are buffered and can support multiple amplifiers. Only one output can be used at a time.
- Full array of input/output connectivity for maximum installation flexibility: line inputs, loop outputs, audio & voltage triggers, (2) Buss input/output, independent volume control per channel.
- Powerful, audiophile grade Class-D power supply. Rated at 8 ohms, 4 ohms & stable into 2 ohms.
- Compact form factor allows for space savings in the equipment rack with ample power to the speakers.
- Convection cooled, fanless design allows for direct stacking with no air gap for even greater power density.
- Class-D design is 93% efficient for maximum power output with minimal power usage.
- Terminal blocks will accept up to 12AWG speaker cable for longer runs & higher performance.
- Certified to worldwide safety standards (TUV, RCM, CE). Meets FCC standards.
- Rack ears and feet included.

## SR 2-125





## SR 2-125 Dimensions

### Dimensions with Feet


Width: 8 5/8" (219mm)  
 Height: 2 1/8" (54mm)  
 Depth: 16 13/16" (427mm)

### Dimensions with Rack Ears & without Feet

Width: 19" (482mm)  
 Height: 1 3/4" (44mm)  
 Depth: 16 13/16" (427mm)

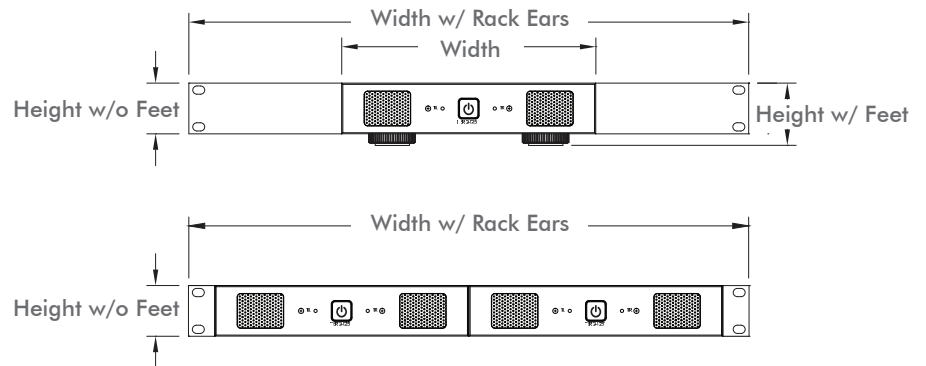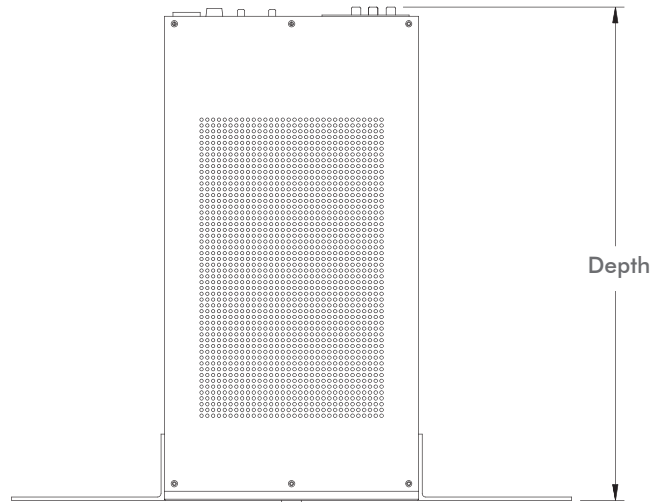

(2) SR 2-125 Digital Amplifiers shown with optional Rack Mount Bracket

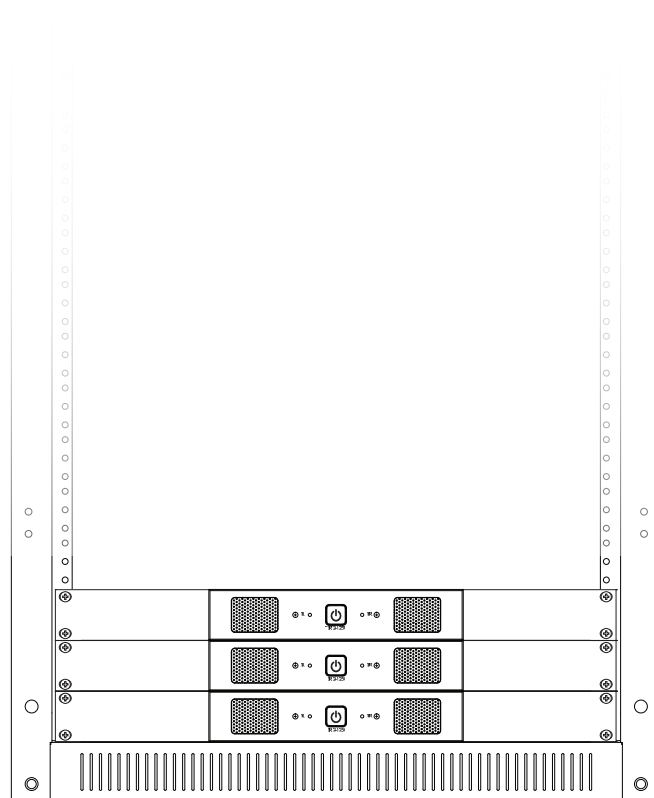


- Compact form factor allows for space savings in the equipment rack with ample power to the speakers
- Convection cooled, fanless design allows for direct stacking with no air gap for even greater power density.
- Class-D design is 93% efficient for maximum power output with minimal power usage.
- Rack ears and feet included.



**SPECIFICATIONS SR 2-125**

SKU	93135
UOM	Each
Number of Channels	2 (1 stereo pair)
Power Output (RMS):	
RMS per channel @ 8 ohms	125 Watts (2 channels driven)
RMS per channel @ 4 ohms	200 Watts (2 channels driven)
Frequency Response	5Hz – 50kHz, bandwidth limited
Total Harmonic Distortion (THD):	
(1kHz) @ 8 ohms	0.07%
(1kHz) @ 4 ohms	0.06%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	5A (T5AL ~ 250V)
Dimensions w/ Feet (W x H x D)	8 5/8" x 2 1/8" x 16 13/16" (219mm x 54mm x 427mm)
Dimensions w/ Rack Ears w/o Feet (W x H x D)	19" x 1 3/4" x 16 13/16" (482mm x 44mm x 427mm)
Rack Space Requirement	1U – 1/2 Rack Width
Shipping Weight	11 lbs (5.0kg)

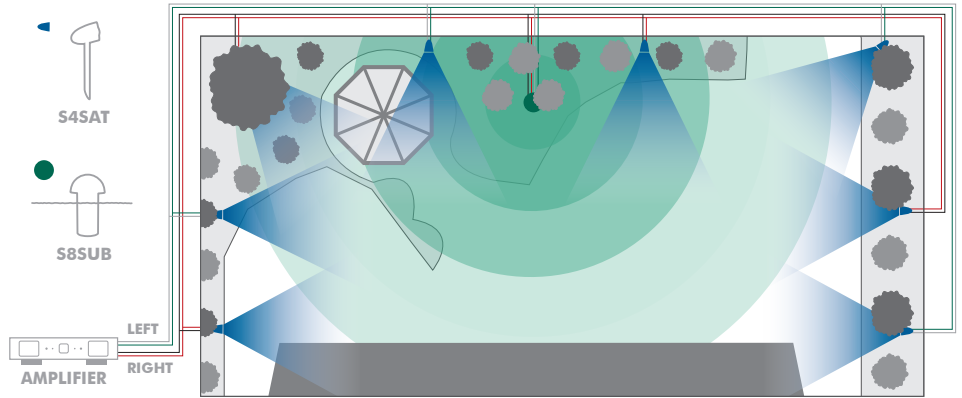

**Associated Products**


Sonarray SR1 System

SKU# 92983



Rack Mount Bracket for SONARRAY SR 2-125

SKU# 93098



Sonarray SR1 System with SR 2-125 Amplifier

SKU# 93134



Note: Allows two 1/2 rack width amps to be rack mounted together in a 1U rack space.

**LIMITED TWO (2) YEAR WARRANTY**

Sonance warrants to the first end-user purchaser that this SR 2-125 Amplifier, when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for two (2) years. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent.

991 Calle Amanecer | San Clemente, CA 92673 USA  
(949) 492-7777 | [www.sonance.com/outdoor/sonarray](http://www.sonance.com/outdoor/sonarray)

SONARRAY is a registered trademark of Ambisonic Systems LLC, Sonance is a trademark of Dana Innovations, registered in the U.S. and other countries. Copyright 2016, all rights reserved. Patent pending. Due to continuous product improvement, all features and specifications are subject to change without notice.