

ring



Spotlight Cam [Battery](#)

Smart security at every corner of your home.

Your new Spotlight Cam lets you extend the Ring of Security around your entire property.

Now, you'll always be the first to know when someone's in your yard, and you can watch over your home from anywhere.

Monitor your home, prevent crime and protect your property – all from your phone, tablet or PC.

Contents

1. Charge the battery
2. Set up your Spotlight Cam
3. Install your Spotlight Cam
4. Need help with setup?


1. Charge the included battery.

Plug it in.

First, fully charge the battery by plugging it into a power source using the provided USB cable.

The small light on top will glow green once fully charged.




 = Charging  = Charged

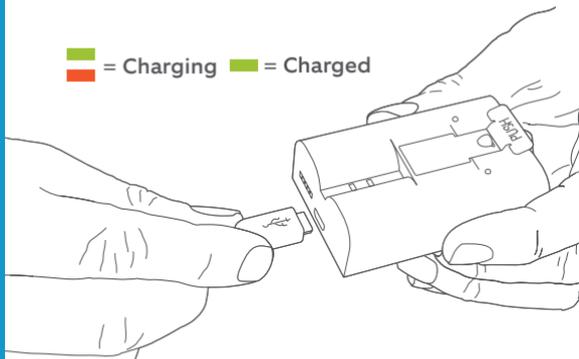

If you can't wait to play with your Spotlight Cam, go ahead and set it up. But, we recommend fully charging it before installation.

Insert the battery.

After charging, insert the battery in your Spotlight Cam until it clicks into place. Then, click the door closed.

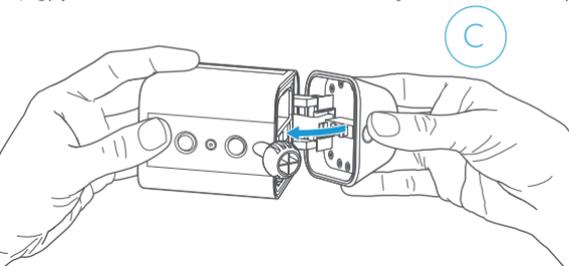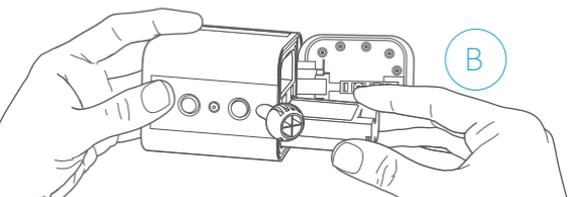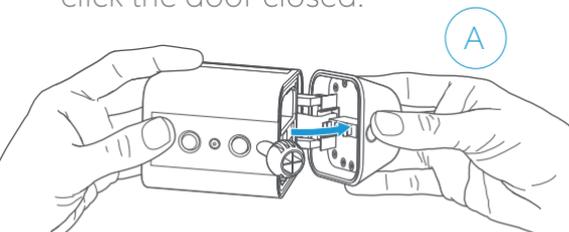

2. Set up your Spotlight Cam in the Ring app.

Download the Ring app.

The Ring app walks you through setting up and managing your Spotlight Cam.

Search for “Ring” in one of the app stores below, or visit: ring.com/app.



Grab your Wi-Fi password.


It's required for the in-app setup. Write it down below so it's handy when you need it:

Your Wi-Fi password 

Set up your Spotlight Cam near your router.


In the Ring app, select **Set Up Device**.

When prompted, select **Spotlight Cam** and follow the in-app instructions.

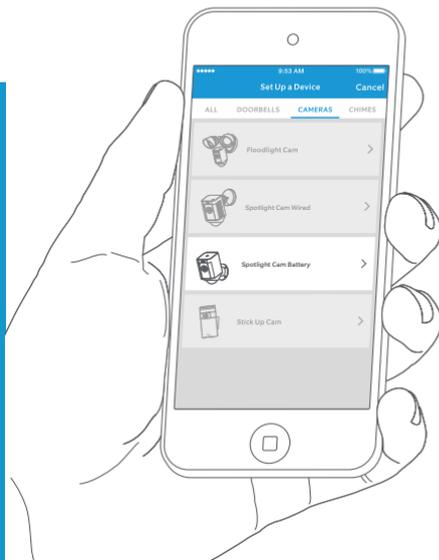

Try it out!

After setup, tap the Live View button in the Ring app to see video from the camera.

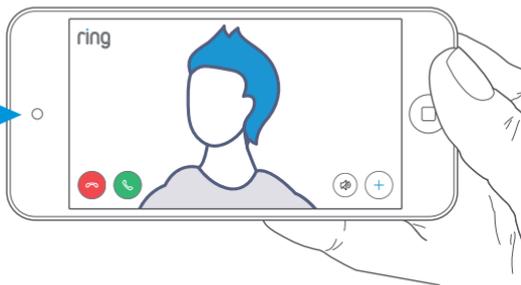

White light flashing?

If the light on the bottom of your Spotlight Cam flashes after setup, it's updating its internal software.

The update process can take up to a few minutes. The light stops flashing when the update is complete.

Test video quality outside.

Now, take your Spotlight Cam outside, near the place where you want to install it. Test video quality again.

Everything look good?

Continue to the next section.

Something not right?

Jump ahead to the troubleshooting section.

3. Install your Spotlight Cam.

What's in the box?



Screwdriver

Use the screwdriver handle to hold the provided bit.



Screwdriver Bit

Use the Phillips end for installing the mounting bracket and the star-shaped end for the security screw on the mounting plate.



Drill Bit

Use this to pre-drill holes if installing on a masonry surface, such as stucco or brick.



Mounting Bracket

Attach this to the wall first, then pop Spotlight Cam into the socket.



Install Screws (5)

Use these to secure the mounting bracket to your wall.



Wall Anchors (5)


Use these to attach the mounting bracket to your wall if installing on a hard surface, such as stucco or brick.

How to remove the mounting plate:

1. Press button to open battery compartment

2. Remove security screw


3. Press release button

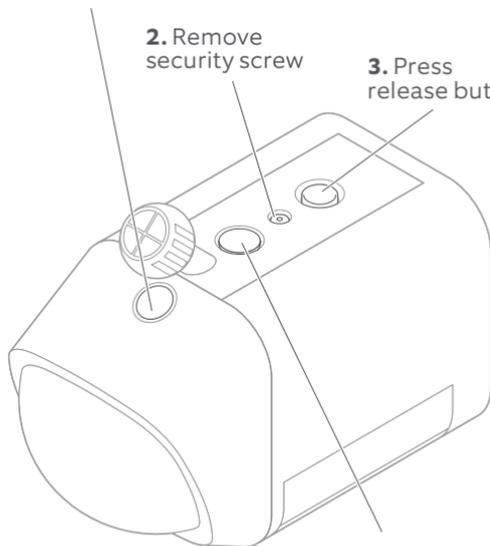

4. Remove weather seal, and insert in unused hole


If installing on a wall:

Before installing Spotlight Cam on a wall, insert the mounting plate with the ball socket pointing down.

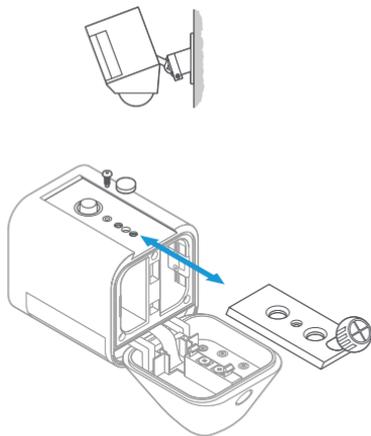

If installing on an eave:



Before installing Spotlight Cam on an eave or overhang, insert the mounting plate with the ball socket pointing up.

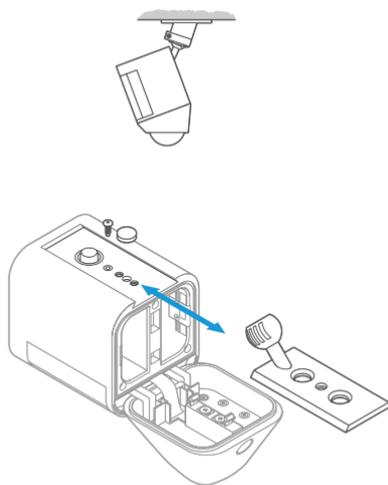

Choose your install height.

When mounted at 9 feet off the ground, with the motion detector parallel to the ground, the motion sensor is optimized to detect human-sized objects at up to 30 feet.

Parallel to ground

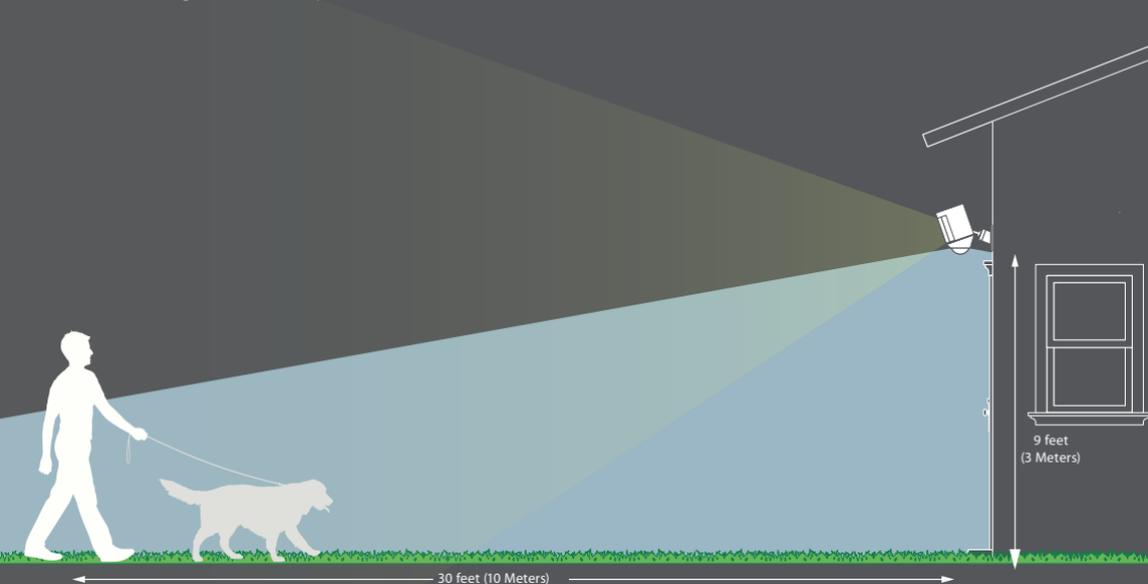

9 feet
(3 Meters)


30 feet (10 Meters)

Install the mounting bracket.

First, mark your holes using the mounting bracket as a guide.

If installing on a masonry surface, first drill holes using the provided drill bit. Insert the wall anchors before inserting the screws.

If installing on a wood surface, you can screw the bracket directly into your wall.

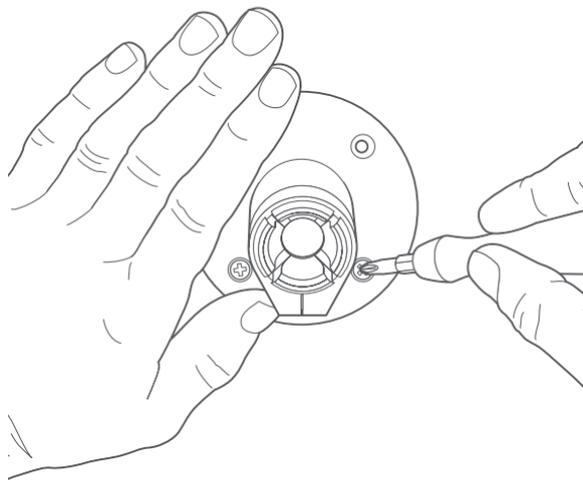



If you have a Ring Solar Panel...

Ring Solar Panel charges your Spotlight Cam continuously—no need to charge or swap out batteries.


If you don't yet have a Ring Solar Panel, skip this section.

For more info, visit ring.com

Mark the holes.

Select an install location where Solar Panel can get at least 1 hour of direct sunlight a day.


Mark the holes using the mounting arm as a template.

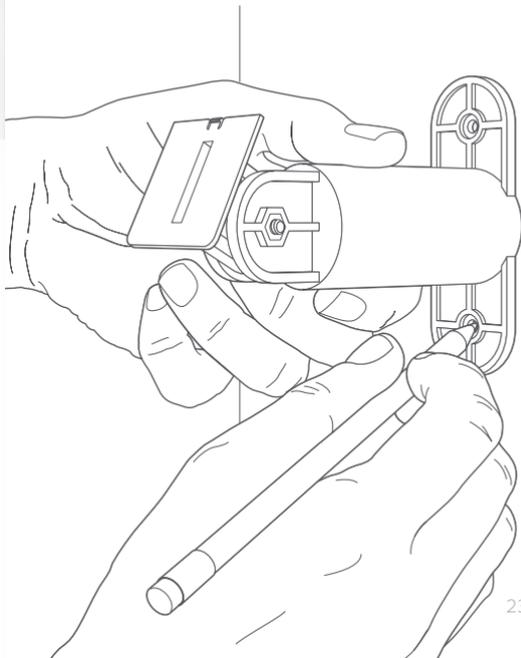

Install wall anchors. (optional)

If installing on a hard surface (such as stucco or brick), use the included drill bit to pre-drill the mounting holes, then insert the wall anchors.

If installing on wood or siding, skip this step.

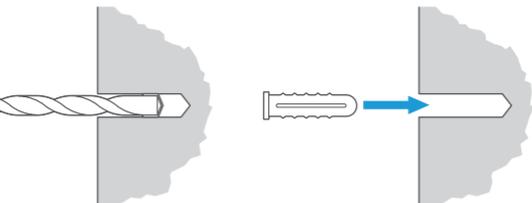


Screw in the mounting arm.

Drive the included mounting screws into your wall (or the wall anchors, if installing on a hard surface) until the mounting arm is secure.




It's easier to screw in the mounting arm before you attach the solar panel.

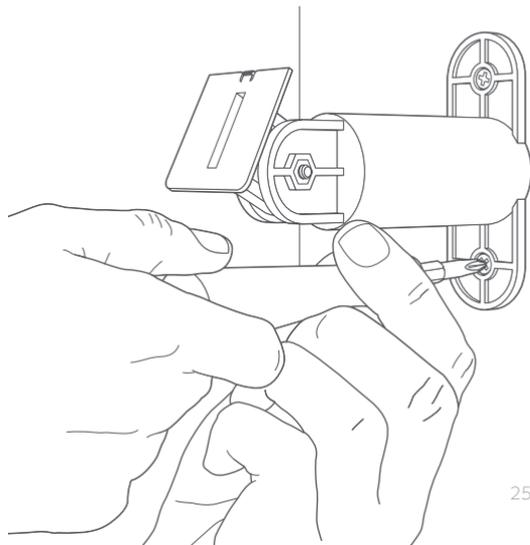


Attach the Solar Panel.

Slot the Solar Panel onto the mounting arm, and make sure it's secure.

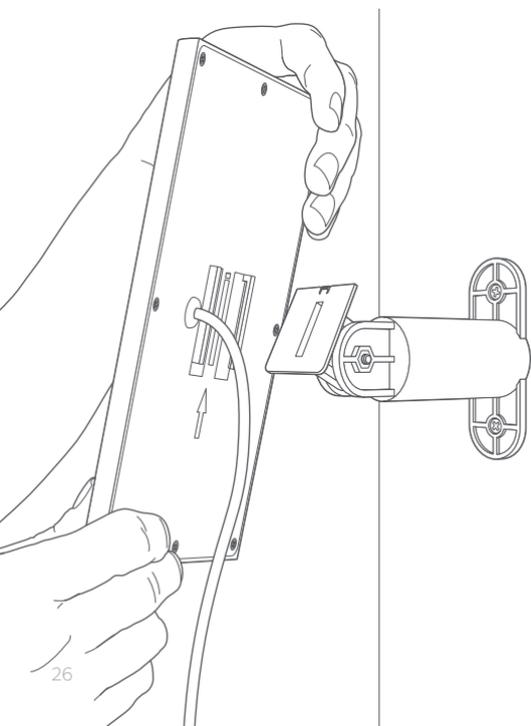

Adjust the panel angle.



Loosen the screw on the mounting arm and adjust the panel to your desired angle, then re-tighten the screw to secure your setting.

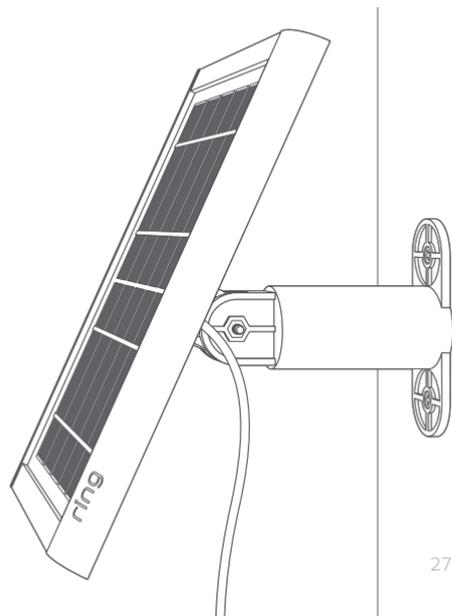


Remove the seal.

Remove the weatherproofing seal on the rear of your Spotlight Cam.


Then, slot the mounting plate back into place.

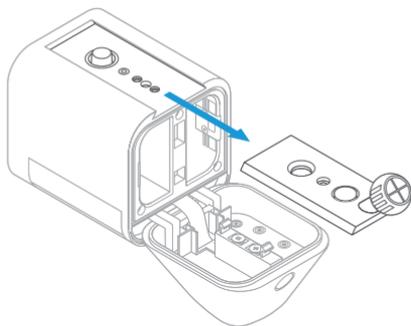

Plug in your Solar Panel.



1



2

If your Solar Panel plug looks like example 1, simply insert it into the power port on the rear of your Spotlight Cam.

Press the plug in firmly, until you feel it click into place. You're all set!

If your Solar Panel plug looks like example 2, skip to the next page.

If your plug has screw tabs...


Insert the plug into the power port on the rear of your Spotlight Cam.

Secure the plug with the included short screws.

Do not use **any other screws** to secure the plug.




Be sure to charge and insert the included battery. Ring Solar Panel charges the battery, but does not replace it.

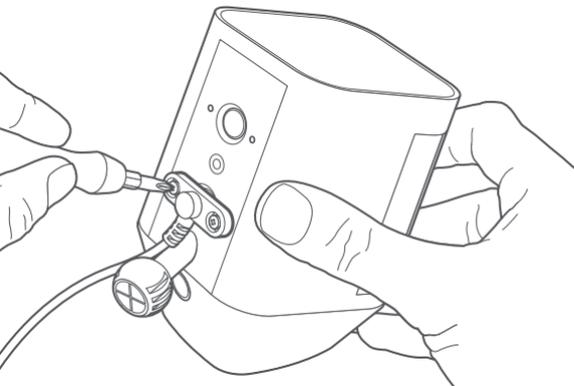

Attach Spotlight Cam to the mounting bracket

First, fully loosen the metal collar on the bracket using the phillips end of the included screwdriver.



Then, push the ball into the socket until it snaps into place.

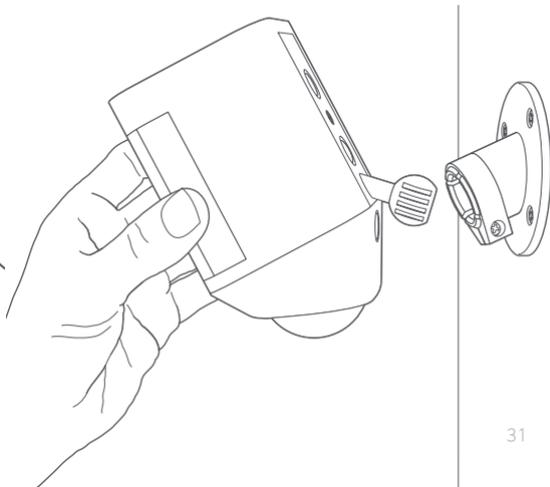

Adjust the camera angle.

To ensure accurate motion detection, position the camera with the motion detector parallel to the ground.

Then, tighten the screw on the metal collar to secure the camera position.

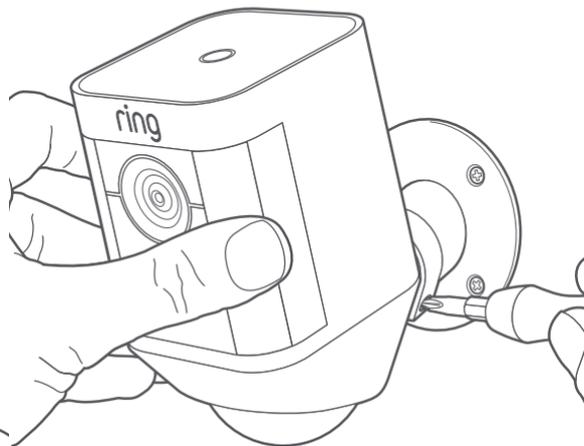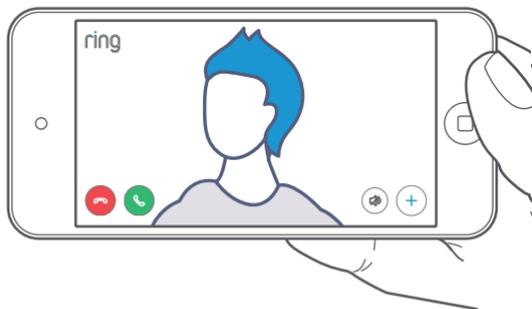

4. Need a little help with setup?

If your in-app setup doesn't go as planned, try these tips:

Get your Wi-Fi password just right.

The most common setup issues come from entering the wrong Wi-Fi password. These passwords are case-sensitive, and every little error counts.

Reboot your router.

If you entered the right password but you're having no luck, try turning your Wi-Fi router off, wait 30 seconds, then turn it back on.

Then, begin setup again in the Ring app.

For additional help, visit:
ring.com/help

Or give us a call...

US 1 800 656 1918

Canada 1 855 300 7289

Mexico (D.F) 52 55 8526 5445

Worldwide +1 310 929 7085

For a list of all of our customer support numbers, visit:
ring.com/callus

To review your warranty coverage, please visit www.ring.com/warranty

Patents: www.ring.com/patents

© 2019 Ring LLC or its affiliates.

Ring, Alexa, Always Home, and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Last updated: 03/14/19